

Reduce Safety Risk during Felt Installation


REGION:	North America
MACHINE:	Solid C-Wrap – Double Press
POSITION:	Pick-up
GRADE:	Tissue and Napkin
BASIS WEIGHT:	9#-19#
SPEED:	5000 fpm
FURNISH:	100% Recycle

OBJECTIVES:

- Reduce Safety Risks of Endless Felt Installation
- Little to No Seam Mark in Sheet

RESULTS:

- Seamed Felt installed in 2 hours versus 6-8 hours
- Seam Mark when specifications for all grades, even lightweight Tissue
- No impact on machine uptime%

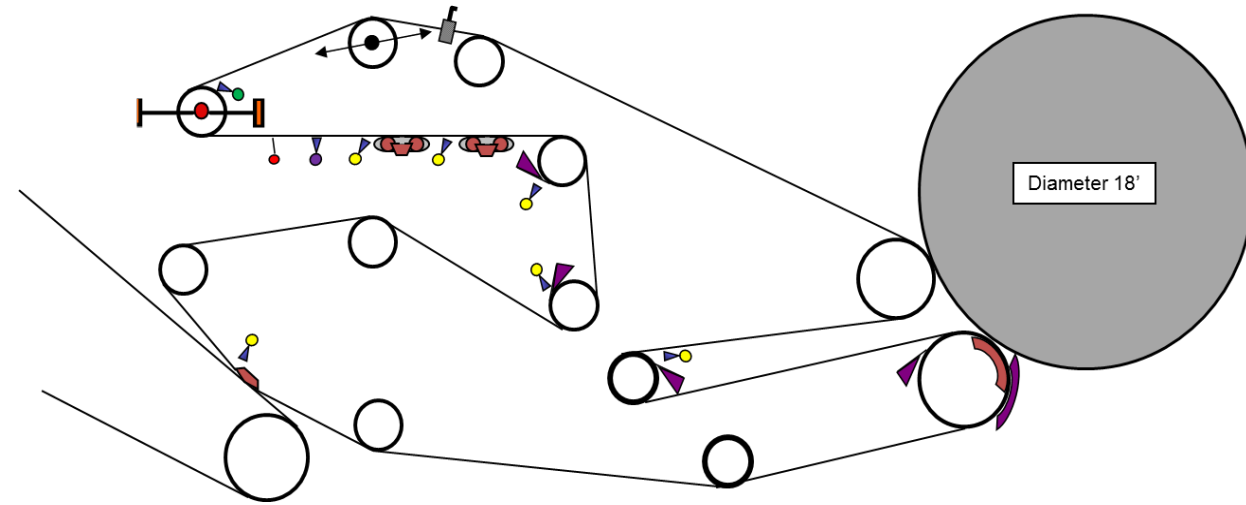

VALUE

- Faster felt install with reduced at risk behaviors